

LS-1201

12.1" High Brightness LCD Monitor



Features

- * High brightness
- * Wide viewing angle
- * OSD control pad on the front panel
- * Fast response time
- * Thin and light

Specifications

Front Panel	Heavy-duty steel (black)
Mounting	Panel, Wall, Rack, VESA arm
Input interface	VGA, DVI
Control	OSD control pad on the front panel
Response Time	50ms (Max)
Power	60W power adapter, AC 100~230V input
Gross Weight	3.8kg (8.4 lb)
Dimension(LxHxD)	338 x 278 x 59.3mm


LCD Display

Size	12.1" XGA TFT LCD
Max. Resolution	1024 x 768
Pixel Pitch	0.24mm x 0.24mm
Max. Colors	262K
Viewing Angle	140° (H), 140° (V)
Luminance	1250 cd/m ²
Contrast Ratio	500:1
LCD MTBF	50000 hrs
Backlight MTBF	25000 hrs

Mechanical and Environmental

Operating Temp.	0 ~ 50°C (32°F ~ 122°F)
Storage Temp.	-20 ~ 60°C (-4°F ~ 140°F)
Operating Humidity	5 ~ 95% non-condensing
Vibration	5 ~ 17Hz, double-amplitude displacement 17 ~ 500Hz, 1.0G peak to peak

Dimension Drawing

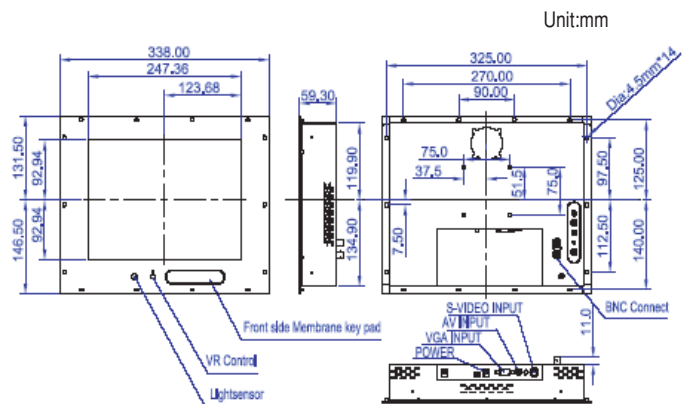

Ordering Information

LS-1201

12.1" High-brightness LCD monitor with tempered glass